

ECTACO® jetBook® – Lite

Portable Reading Device

USER MANUAL

More manuals are available at www.ectaco.com/support/manuals

Ectaco, Inc. assumes no responsibility for any damage or loss resulting from the use of this manual.

Ectaco, Inc. assumes no responsibility for any loss or claims by third parties, which may arise through the use of this product.

Ectaco, Inc. assumes no responsibility for any damage or loss caused by deletion of data as a result of malfunction, repairs, or battery replacement. Be sure to back up all important data on other media to avoid data loss.

The contents of this manual are subject to change without notice.

No part of this manual shall be reproduced, stored in a retrieval system, or transmitted by any means, electronic, mechanical, photocopying, recording, or otherwise, without permission from Ectaco, Inc.

jetBook® is a registered trademark of ECTACO, Inc., NY, USA.

© 1990–2010 ECTACO, Inc., New York, USA.

All rights reserved.

The names of actual companies and products mentioned herein may be the trademarks of their respective owners.

FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CONTENTS

INTRODUCTION	7
GENERAL VIEW	9
POWER SUPPLY	10
How to Replace the Batteries	10
Power On / Power Off	10
Initialization	11
INSTALLING SD CARD	11
MAIN MENU	12
READING BOOKS	12
Reading Books	12
Selecting Language for Books	14
Selecting Dictionary and Translating Unfamiliar Words	14
TRANSFERRING BOOKS AND PICTURES	16
VIEWING PICTURES	17

ENTERING LETTERS AND NUMBERS	18
T9 Text Input.....	18
SETTINGS.....	19
User Settings	19
System Settings	20
Internal File Manager	21
SD Card File Manager	21
INTERNATIONAL WARRANTY	22

INTRODUCTION

Congratulations on your purchase of the *ECTACO® jetBook® – Lite* Reader! The product you have purchased is the result of the combined efforts of the ECTACO team of linguists, engineers, and programmers. *ECTACO® jetBook® – Lite* is your ultimate library of books and pictures.


ECTACO® jetBook® – Lite features:

- ❖ Electronic books viewer and manager
- ❖ Support for electronic book contents in English, Spanish, Russian, Polish, German and other languages
- ❖ FictionBook (.fb2), Plain Text (.txt), Mobipocket (.mobi), PRC, PDB, EPUB, RTF, HTML, PDF, GIF, JPG, PNG, and BMP support
- ❖ Bookmarks and auto turn page function
- ❖ Adjustable font type and size
- ❖ Support for screen rotation (portrait & landscape modes)


- ❖ Built-in English ↔ Spanish, English ↔ Russian, English ↔ Polish, English ↔ German and English explanatory dictionaries
- ❖ Picture viewer
- ❖ 100MB internal memory
- ❖ SD slot for SD and SDHC cards for thousands of books
- ❖ Compact and lightweight casing
- ✓ As continuous efforts are being made by the manufacturer to ensure the best quality and performance of the ECTACO® products, some characteristics of the device you have purchased may slightly differ from their description in this manual.

GENERAL VIEW

The general view and external features of *ECTACO® jetBook® – Lite* are shown below.

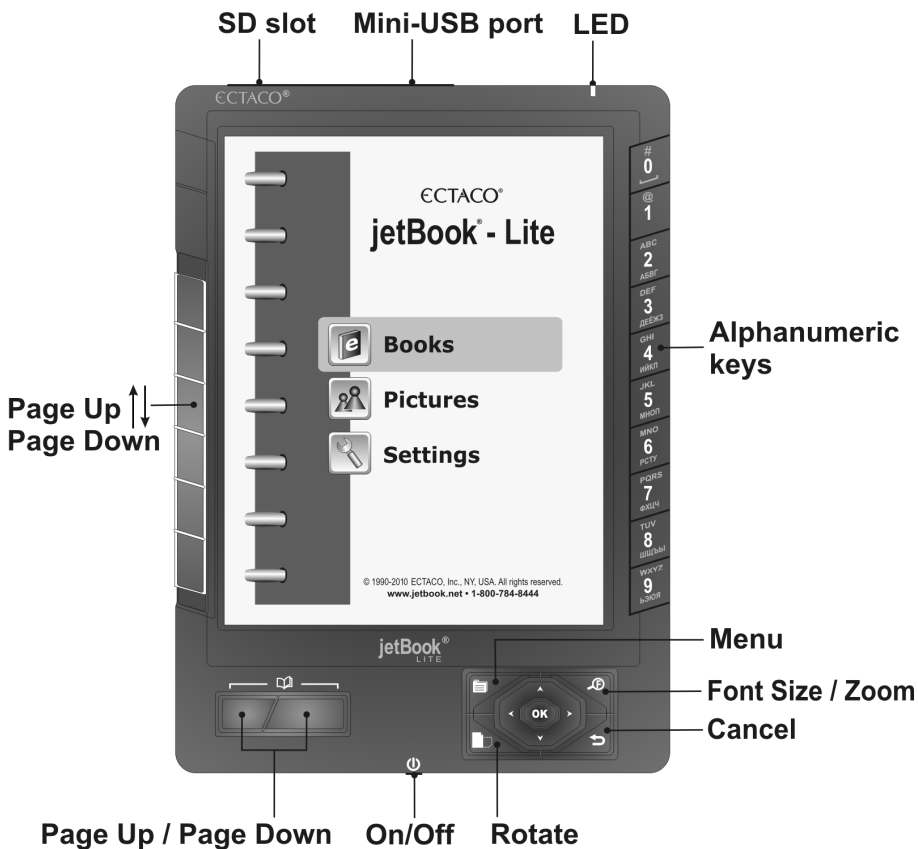

POWER SUPPLY

The device is powered by four AA batteries. When the batteries become weak, the battery life picture is shown as .

How to Replace the Batteries

- Ensure the power is off. Press *On/Off* to turn the device off.
- Remove the battery compartment cover by sliding it away from the device.
- ✓ Remove the used batteries and replace them with new ones. Make sure to place the batteries according to the polarity marks (+ -). Do not mix old and new batteries.
- Replace the battery compartment cover.

Power On / Power Off

- When the device is powered off, press the *On/Off* button to turn it on.
- ✓ After the system has been reset, press and hold the *On/Off* button for 3 seconds to turn the device on. It may take about 1 minute for the device to start up.
- When the device is powered on, press the *On/Off* button to turn it off.

Initialization

In the rare event that the data on the screen is corrupted or a program is not responding properly, you will need to perform a reset. The *Reset* button is located on the back of the device. It can be accessed with any thin object like a paper clip. Never use a needle or a sharp pin for this purpose since it can damage the device.


- After pressing the *Reset* button, press and hold the *On/Off* button for 3 seconds to turn the device on.

INSTALLING SD CARD

ECTACO® jetBook® – Lite supports SD and SDHC cards for storing thousands of books.

- Unfasten the SD slot cover.
- If the card is not installed, slide it into the slot – the contacts of the card positioned towards the battery compartment, label positioned towards the device screen. Push the card gently until it clicks into place.
- To eject the card, just push it in slightly.



MAIN MENU





To display the *Main Menu*, turn the device on and/or press and hold the  key for 3 seconds. The *Main Menu* consists of the following sections: *Books*, *Pictures*, and *Settings*.

READING BOOKS





ECTACO® jetBook® – Lite comes with a set of preinstalled books. It also allows downloading additional books from various sources. The following book formats are supported: Plain Text (.txt), FictionBook (.fb2), Mobipocket (.mobi), PRC, PDB, EPUB, RTF, HTML, and PDF. The device supports DRM-protected files. **For best performance, it is recommended that you use TXT (text) files.**

Reading Books


- In the *Main Menu*, select *Books* by pressing ▼ or ▲ and then press *OK*. You will see a list of the available folders and/or book titles.
- ✓ When a list of items is displayed, press  to change font size.
- Use ▼, ▲ or  to scroll through the list.

- To open the *Option* menu, press . You will see the following options: *Jump To*, *Recent Readings*, *Clear all Recent Readings*, *sorting by Title* or *by Author*, and *Delete selected book*.
- Press the corresponding numeric key on the right-hand side of the device to open the respective item. Alternatively, select it by pressing  or  and then press *OK*. If you have opened a wrong item, press  to go back.

When in the reading mode, use:

-  to page up / page down;
 -  to switch screen orientation (portrait/landscape);
 -  to activate the *Function* menu which has the following options: *Dictionary*, *Bookmark List*, *Bookmark This Page*, *Find*, *Jump To*, *Settings* – these items can also be accessed by pressing numeric keys on the right-hand side of the device;
 -  to change *Font Size*.
- ✓ The *Settings* submenu has the following options: *Font Size*, *Auto Turn Page*, *Rotate*, *Alignment*, *Encoding*, and *Dictionaries*.

Selecting Language for Books



- Open your book.
- When in the reading mode, press  to activate the *Function* menu.
- In the *Function* menu, choose *Settings / Encoding*.
- Select *Cyrillic (1251)* for Russian, *East European Latin (1250)* for Polish and other Central European languages, *West European Latin (1252)* for English, Spanish, German and other Western European languages. *Turkish (1254)*, *Hebrew (1255)*, *Arabic (1256)*, *Baltic (1257)*, *UTF-8*, and *Auto-detect* are also available.

Selecting Dictionary and Translating Unfamiliar Words²

The English ↔ Russian, English ↔ Polish, English ↔ Spanish, English ↔ German, and English explanatory dictionaries built into ECTACO® jetBook® – Lite allow you to instantly translate an unfamiliar word.

- Open your book.

² Check our Web site www.jetbook.net for the latest information about the formats that are supported.

- When in the reading mode, press 6.
 - Alternatively, press  and then select *Settings* in the menu that appears.
- Select *Dictionaries*. You will see the *Dictionaries* list.
- Select the desired dictionary for use in the book: *English Dictionary*, *Eng-Rus Dictionary*, *Eng-Pol Dictionary*, *Eng-Spa Dictionary*, *Eng-Ger Dictionary*, *Rus-Eng Dictionary*, *Pol-Eng Dictionary*, *Spa-Eng Dictionary*, or *Ger-Eng Dictionary*.
- When in the reading mode, press 1.
 - Alternatively, press . You will see the *Function* menu.
 - Select the *Dictionary* option. The menu will disappear.
- Press ▼, ▲, ◀, ▶ to highlight the word you want to translate.
- Press *OK*. You will see the translation window.
- Use ▼, ▲ to scroll through the dictionary entries.
- Use ◀, ▶ to switch between dictionaries.
- Press *OK* to enter a new search term in the *Find word(s)* window.

TRANSFERRING BOOKS AND PICTURES

The USB mass storage capability allows you to copy electronic books and pictures to your device.

- Turn the device on. Turn your PC on.
- Unfasten the mini-USB port cover and then connect *ECTACO® jetBook® – Lite* to your computer using the supplied USB cable.

You will see the *Removable Disk* popup, and one removable disk icon (if no SD card is installed) or two removable disk icons (if an SD card is installed) will appear in the *My Computer* window.

- In the *My Computer* window, double-click the removable disk icon. When browsing through the contents stored in the internal memory of the device, you will see the following folders: *Books* and *Pictures*. **Do not delete or rename these folders!**
- Copy your files to the respective folders. For example, copy your books to the *Books* folder.
- ✓ There is no such a restriction for the files stored on the SD card.





- To disconnect *ECTACO® jetBook® – Lite* from your computer, click the *Safely Remove Hardware* icon at the bottom right of the screen and then select *Safely remove USB Mass Storage Device* in the menu that appears.
- In the *Main Menu*, open the desired section – *Books* or *Pictures*. You will see the items you have copied and the preinstalled items, if any.

VIEWING PICTURES

ECTACO® jetBook® – Lite is capable of storing and displaying pictures in JPG, GIF, PNG, and BMP formats.

- In the *Main Menu*, select *Pictures*. You will see the *Pictures* list.
- Select the desired file by pressing ▼, ▲ and then press *OK*.

With a picture displayed, use:

-  to page up / page down;
-  to switch screen orientation (portrait/landscape);
-  to activate the *Functions* menu which has the following options: *Rotate*, *Zoom In*, *Zoom Out*, *Full Screen*, *Original Size*, and *Auto Turn Page*;
-  to change zoom level.

- ✓ You can also change zoom level by pressing alphanumeric keys on the right-hand side of the device.


ENTERING LETTERS AND NUMBERS

When entering a text, please use the following information.

- Press the *Page Up / Page Down* keys to switch between English (*Eng*), Russian (*Rus*), Polish (*Pol*), Spanish (*Spa*), German (*Ger*), T9 English (*T9 Eng*), T9 Russian (*T9 Rus*), T9 Polish (*T9 Pol*), T9 Spanish (*T9 Spa*), T9 German (*T9 Ger*), and numeric (*123*) input modes.

T9 Text Input

The T9 text input method uses built-in dictionaries that recognize the most commonly used words for each sequence of keystrokes.

- Enter the word by pressing one key per letter. Use  for Backspace.
- ✓ The succession of letters displayed on the screen is not valid until the whole word is typed.
- Select the desired word and press *OK*.

SETTINGS


Fine-tune your *ECTACO® jetBook® – Lite* by selecting options in the *Settings* section.

- In the *Main Menu*, select *Settings*. You will see the *Settings* menu which has the following submenus: *User Settings*, *System Settings*, *Internal File Manager*, and *SD Card File Manager*. Their respective options are described below.
- ✓ In *ECTACO® jetBook® – Lite*, you can select a menu item by pressing the corresponding numeric key on the right-hand side of the device.

User Settings

Languages Select the interface language: Russian, Polish, Spanish, German, or English.

Auto Power Off This feature saves battery life by putting the device into suspend mode after a specified period of inactivity: 3, 5, 10, 15, 30 minutes, or *Never*.

- Auto Turn Page* When in the reading mode, performs auto page turning with a specified period: 5, 10, 20, 30, 40, 50, 60 seconds, or *Never*. In the reading mode, the  icon will be shown at the top of the screen. The *Loop Page Turning* option determines whether to restart page turning from the beginning of the book.
- Fonts* Select the desired font for displaying books: *Arial* or *Verdana*.

System Settings

- Serial Number* Show the device serial number.
- Battery* Check battery status.
- Memory Capacity* Check free memory available in your device.
- Card Capacity* Check free memory available on the SD card.
- Firmware Version* Show the *ECTACO® jetBook® – Lite* firmware version.

<i>Restore Defaults</i>	Discard custom settings. Press <i>OK</i> to confirm.
<i>Upgrade Patch</i>	Update the <i>ECTACO® jetBook® – Lite</i> firmware, if available.

Internal File Manager

Using this function, you can manage books, pictures, and other files stored in the internal memory of the device (100MB capacity).

- Select the desired item and then press .

You will see the *Files* menu which has the following options: *Create New Folder*, *Copy*, *Delete*, and *Rename*.

- Select the desired option and then press *OK*.

SD Card File Manager

Using this function, you can manage books, pictures, and other files stored on the SD card.

- ✓ The available operations are the same as those used in the *Internal File Manager*.

INTERNATIONAL WARRANTY

ECTACO, Inc. (Ectaco) guarantees to the end user that this product will be free of defects in material and craftsmanship for a period of ONE YEAR from the date of original retail purchase, as evidenced by the sales receipt.

This warranty does not apply if any other party has damaged the product by accident, abuse, and misuse, or as a result of service. Except for the limited warranties above, this product is provided on an "as is" basis, without any other warranties or conditions, expressed or implied, including but not limited to, warranties of merchantable quality, merchantability or fitness for a particular purpose, or those arising by law, statute, usage of trade, or course of dealing. Neither Ectaco nor its dealers or suppliers shall have any liability for any indirect, incidental, special, or consequential damages whatsoever, including but not limited to, loss of revenue or profit, lost or damaged data or other commercial or economic loss, even if we have been advised of the possibility of such damages, or they are otherwise foreseeable. We are also not responsible for claims by a third party. Our maximum aggregate liability to you, and that of our dealers and suppliers, shall not exceed the amount paid by you for the Ectaco product as evidenced by your purchase receipt. If the laws of the relevant jurisdiction do not permit full waiver of implied warranties, then the duration of implied warranties and conditions are

limited to the duration of the express warranty granted herein. This warranty applies only to the products manufactured by Ectaco and does not include batteries etc. Any damages caused by batteries are not covered by this warranty.

You may obtain additional information regarding the extended warranty program or reach a customer service representative at the following telephone numbers or addresses.

North America

USA, New York

Ectaco, Inc.
Ectaco Corporate Center,
31-21 31st Street
Long Island City, NY, 11106
Tel.: +1-718-728-6110
Technical support: +1-718-728-3605
E-mail: sales@ectaco.com

USA, Chicago

5700 W. Belmont Ave.,
Chicago, IL, 60634
Tel.: +1-773-202-0729
E-mail: chicago@ectaco.com

Canada

Ectaco-Canada, Inc.
1706 Dundas Street East
Mississauga, ON, L4X 1L7
Tel.: +1-905-267-3767
E-mail:
mississauga@ectaco.com

Europe and Asia

Poland, Warsaw

Ectaco-Poland, Sp. z o.o.

Tel.: +48-22-647-27-61

E-mail: poland@ectaco.com

United Kingdom, London

Ectaco (UK) Ltd.

Tel.: +44-208-980-2904

E-mail: uk@ectaco.com

Germany, Berlin

Ectaco-Germany, GmbH.

Tel.: +49-30-3180-420

E-mail: germany@lingvobit.de

Czech Republic, Prague

Ectaco-Czech, Ltd.

Tel.: +420-2-6126-3098

E-mail: ceska@ectaco.com

Kazakhstan, Astana

Ectaco-Bilimpaz Astana

Tel.: +7-7172-412691

E-mail: west.kalka@mail.ru

Russia

Ectaco-Russia, Ltd.

St. Petersburg

Tel.: +7-812-545-3838

E-mail: russia@ectaco.com

Moscow

Tel.: +7-495-737-8910

E-mail: moscow@ectaco.ru

Spain, Madrid

Traductoras y Diccionarios

Electrónicos S.L.(TYDE S.L.)

Tel.: +34-667-91-55-05

E-mail: espana@ectaco.com;

contactar@partner-tyde.com

Ukraine, Kiev

Tel.: +38-044-419-13-03

E-mail: ukraine@ectaco.com

Visit us on the Internet at

www.ectaco.com

www.jetbook.net